

# Proposal Content Document Form

**Table 1:** General proposal content description

<b>Proposal title</b>	Coyote Gold Mine, Stage 2 Approximately 280 km south-east of Halls Creek, Tanami Desert, Shire of Halls Creek
<b>Proponent name</b>	Black Cat (Coyote) Syndicate Pty Ltd
<b>Short description</b>	<p>The Proposal is to produce a total of 515,000 tonnes of ore for gold production from three open pits, Kookaburra, Sandpiper and Osprey and construct associated mine infrastructure including waste rock landform, ROM and evaporation pond. Pits will be mined below the water table and Osprey pit will be backfilled. Excess mine dewater will be discharged to an evaporation pond.</p> <p>No crushing or processing will occur on site with ore transported along a new 35km haul road to the existing Coyote (Stage 1) processing plant. Transport of ore will occur on a campaign basis.</p> <p>Water supplied from pit dewatering. Excess mine dewater will be discharged to an evaporation pond. Sewage treated in biological treatment units.</p> <p>Clearing of no more than 152.95 of native vegetation.</p>

**Table 2:** Proposal content elements

<b>Proposal element</b>	<b>Location / description</b>	<b>Existing Proposal extent, capacity or range</b>	<b>Proposed Amendment (Content of section 45C amendment)</b>	<b>Combined extent, capacity or range</b>
<b>Physical elements</b>				
Mine and associated infrastructure	Figure 2	Clearing of no more than 120 ha of native vegetation which includes the following pit areas: <ul style="list-style-type: none"> <li>• Sandpiper – approximately 6.1 ha</li> <li>• Kookaburra – approximately 7.3 ha</li> <li>• Osprey – approximately 0.43 ha.</li> </ul>	Disturbance of 32.95 ha above the approved (current disturbance footprint).	Clearing of no more than 152.95 ha of native vegetation. <ul style="list-style-type: none"> <li>• Sandpiper – approximately 6.1 ha</li> <li>• Kookaburra – approximately 7.8 ha</li> <li>• Osprey – approximately 0.43 ha</li> </ul>

<b>Operational elements</b>				
Ore and Waste Materials	Open pits and WRD	Approximately 515,000 t of ore  Approximately 4.35 Mm3 of waste	No change.	No change.
Pit dewatering and groundwater abstraction	Existing open pits	1,600 kL/day	No change.	No change.
<b>Proposal elements with greenhouse gas emissions</b>				
N/A – not an EPA factor at time of approval			No change.  Emissions with short-term haulage considered insignificant	No change.
<b>Commissioning</b>				
Commissioning of the evaporation pond to allow mine dewater discharge to the facility.			No change	No change
<b>Rehabilitation</b>				
Total area for disturbance less the pit area for Sandpiper and Kookaburra. All rehabilitation is regulated under the Mining Act 1978 and will be undertaken in accordance with the approved MCP.			No change	No change
<b>Other elements which affect extent of effects on the environment</b>				
Proposal time*	25 months		Additional 3-6 months	31 months (maximum)

\* Proponents should only provide realistic timeframes to avoid unnecessary change to proposal applications at referral (section 38C), assessment (section 43A) or post assessment (section 45C).

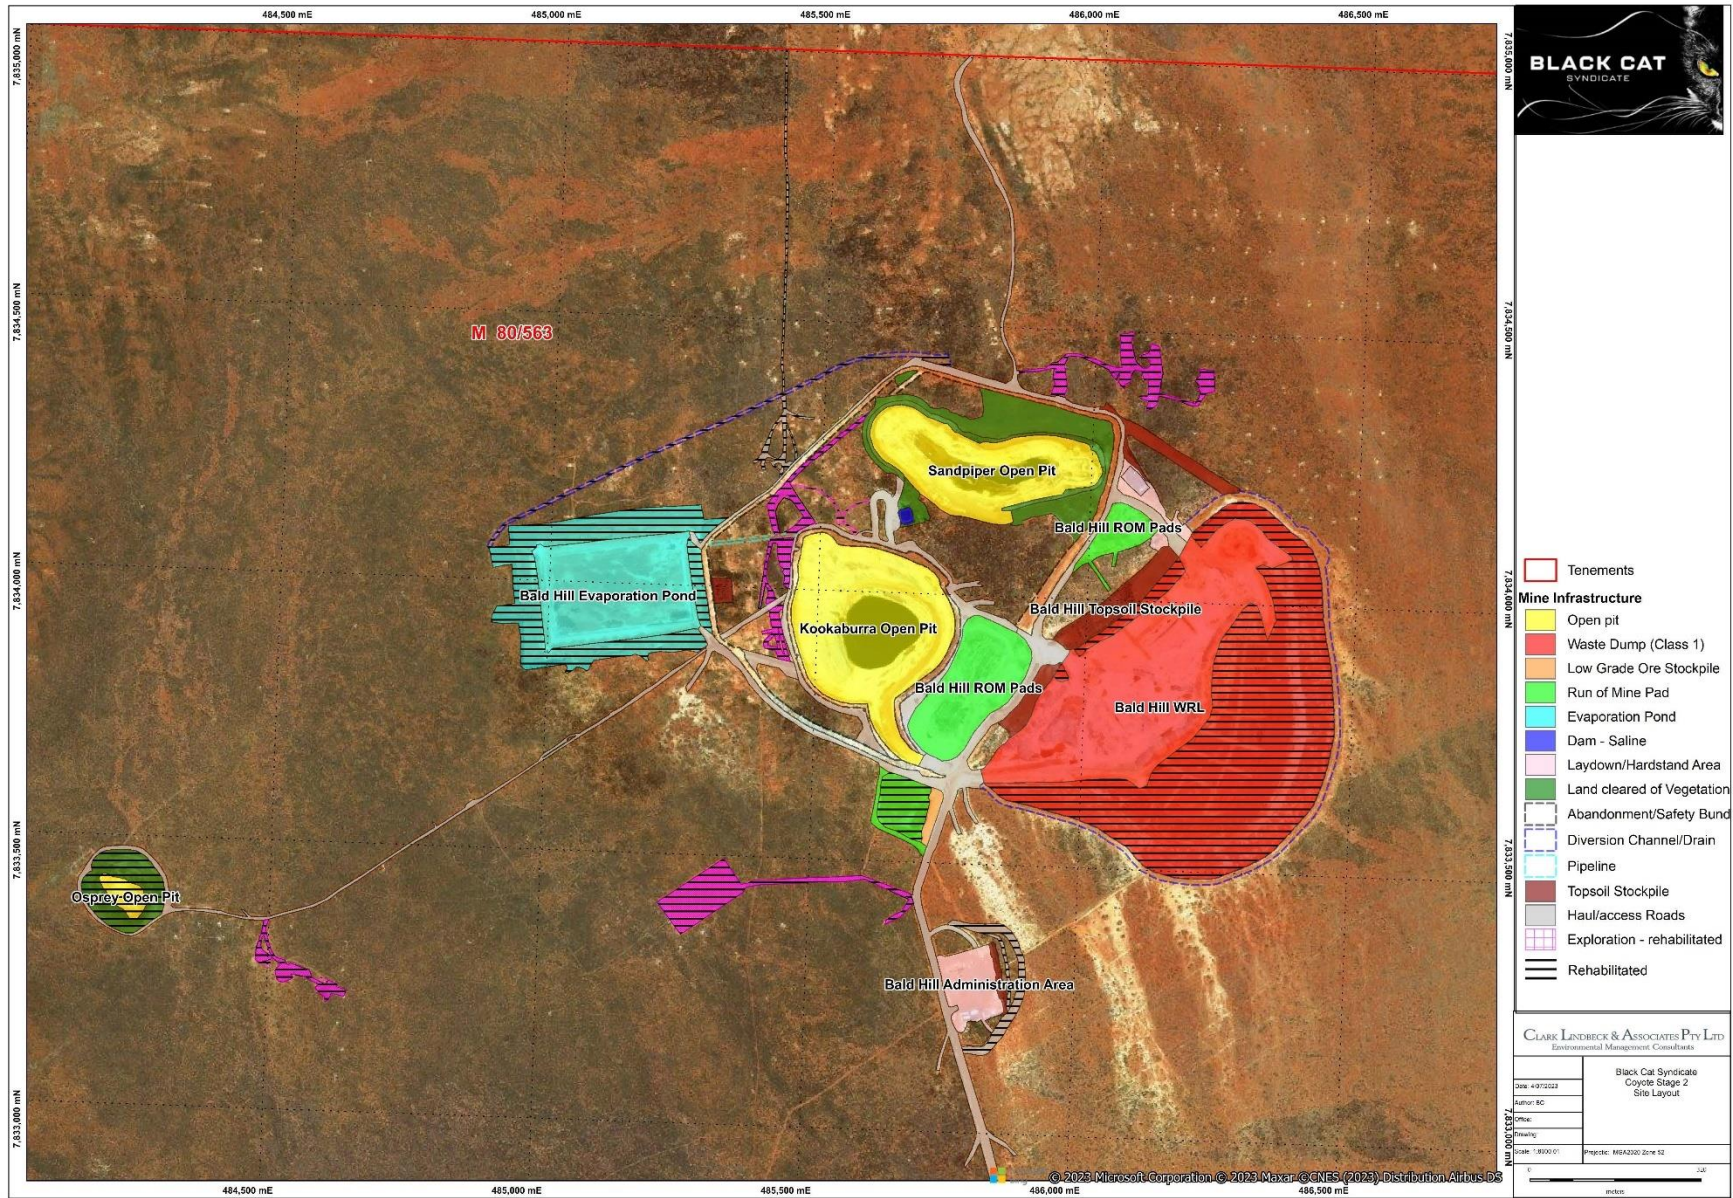


Figure 1: Coyote – Stage 2 Project Area

